


Sample of single- and dual coil




Coil wire: dia 2.5mm (recommended)

1. Pull a strand cotton through the coil
2. Place cotton in front of each liquid hole. The nipple (middle of the deck) will help you to keep the cotton in place.
3. Press the cotton well to the holes
4. Connect both sides with more cotton (only with single coil setup)

Single Coil

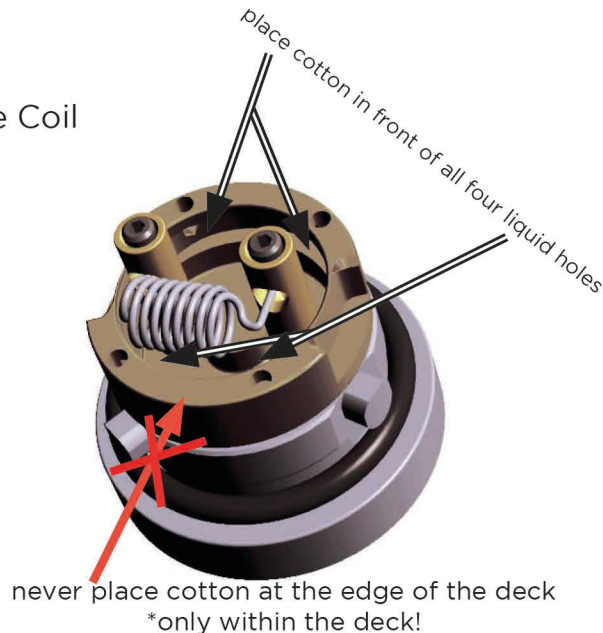

Dual Coil

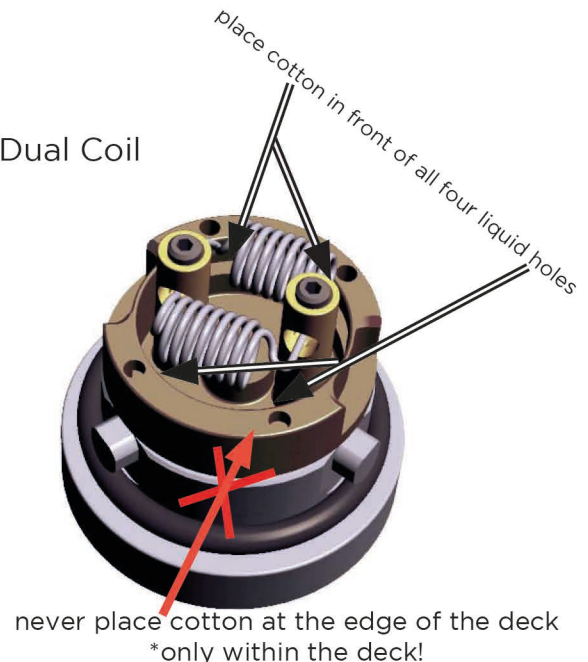

.....
It is possible to place a coil between the two poles - this might be usefull for temp. control setups.
.....